


STD SERIAL CONFIGURATION  
OHNE LABEL ID



Heron™ HD3130  
Linear Imager



Restore USA Factory Configuration

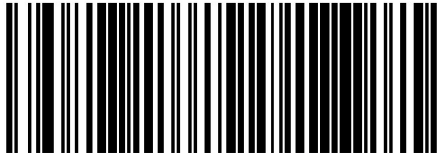

Select RS232-STD




STD SETTINGS:   BAUD=9600  
                  DATA=8  
                  STOP=1  
                  PARITY=N  
                  HANDSHAKING-CONTROL=RTS

For other serial settings see: “Product Reference Guide (PRG), heron HD3130.pdf”  
from page 31/304 and up



Enter/Exit Programming Mode

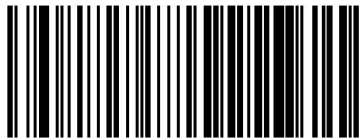

Label ID Transmission = Disable



Enter/Exit Programming Mode

NOVOPOS AG

30.10.2017 Fe