

Museo Configuration for Magellan AUX-Port

Museo Konfiguration für Magellan AUX-Port

Cable coiled/grey: CAB-362 SH3924 (90G001092)

Cable coiled/grey: CAB-362 SH4132 (90G001095)

Cable coiled/black: CAB-461 (90A051993) (Industrial)

SCANNEN MIT GRYPHON,
OHNE PS ANGESCHLOSSEN,
MIT DATENKABEL SERIEL,
EINGESTECKT AM AUX-PORT
DES MAGELAN

USA Factory Configuration (Default)



1STE UND 2TE SEITE LANGSAM
NACHEINANDER EINSCHANNEN.

INTERFACE

DANACH AUF 3TER SEITE MIT
DEM MAGELAN DEN
ENABLE AUX-PORT SCANNEN.
(LANGE AUFS GLAS HALTEN)

RS232-STD (9600-8-N-1, RTS)



DIE BAUD-RATE IST DEFAULT BEI
BEIDEN SCANNER 9600,8,1,N

Global Suffix = Disable

NUN SOLLTEN VOM GRYPHON
SOWIE VOM MAGELAN DIE
BARCODES GELESEN WERDEN
KÖNNEN.



FALLS NICHT: GERÄTE STROMLOS
MACHEN UND NEU STARTEN.

DATA EDITING

23.8.2017 FE
NOVOPOS AG

Label ID Transmission = Enable as Prefix



Set DataBar Expanded Label ID Characters = R4



Set DataBar Limited Label ID Characters = R4



DataBar Omnidirectional Label ID Characters are already R4!
DataBar Omnidirectional Label ID Charakters sind schon R4!

SYMBOLOGIES

The symbologies must be also activated on the Magellan!
Die Symbologien müssen auch am Magellan aktiviert sein!

DataBar Expanded = Enable



DataBar Omnidirectional = Enable



DataBar Limited = Enable



Code 39 Start/Stop Character Transmission = Enable



UCC-EAN 128 = Transmit in EAN 128 data format



Interleaved 2 of 5 = Enable



Codabar = Enable



Codabar Check Character Set = ABCD/ABCD



BEEPER INDICATOR OPTIONALLY / OPTIONAL

Good Read Beep Volume = **OFF**



Good Read Beep Volume = **LOW**



Good Read Beep Volume = **MEDIUM**




Good Read Beep Volume = **HIGH** (Default)



CONFIGURATION BARCODE FOR MAGELLAN FAMILY

Enable AUX-Port

AUXILIARY PORT MODE = EXTERNAL HANDHELD INPUT

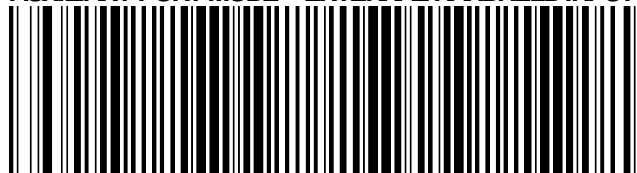

³ 0 0 0 0 0 0 □ 0 0 0 1 1 2 □ 0 0 0 0 0 □