

Museo Configuration for Magellan AUX-Port

Museo Konfiguration für Magellan AUX-Port

Cable coiled/grey: **CAB-362 SH3924** (90G001092) (Gryphon i & QuickScan i)

Cable coiled/grey: **CAB-362 SH4132** (90G001095) (Gryphon i & QuickScan i)

Cable coiled/black: **CAB-461** (90A051993) (Powerscan 71xx)

USA Factory Configuration (Default)



\$P,AE,P

INTERFACE

RS232-STD (9600-8-N-1, RTS)



\$P,HA05,P

Global Suffix = Disable



\$P,CLFSU0000,P

DATA EDITING

Label ID Transmission = Enable as Prefix



\$P,CIDC001,P

Set DataBar Expanded Label ID Characters = R4



\$P,CXBI D5234,P

Set DataBar Limited Label ID Characters = R4



\$P,CLBI D5234,P

DataBar Omnidirectional Label ID Characters are already R4!
 DataBar Omnidirectional Label ID Charakters sind schon R4!

SYMBOLOGIES

The symbologies must be also activated on the Magellan!
 Die Symbologien müssen auch am Magellan aktiviert sein!

DataBar Expanded = Enable



DataBar Omnidirectional = Enable



DataBar Limited = Enable



Code 39 Start/Stop Character Transmission = Enable



UCC-EAN 128 = Transmit in EAN 128 data format



Interleaved 2 of 5 = Enable



Codabar = Enable



Codabar Check Character Set = ABCD/ABCD




BEEPER INDICATOR OPTIONALLY / OPTIONAL

Good Read Beep Volume = **OFF**




\$P, CBPV000, P

Good Read Beep Volume = **LOW**

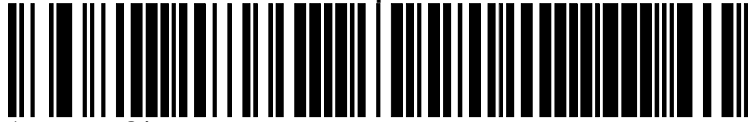


\$P, CBPV001, P

Good Read Beep Volume = **MEDIUM**

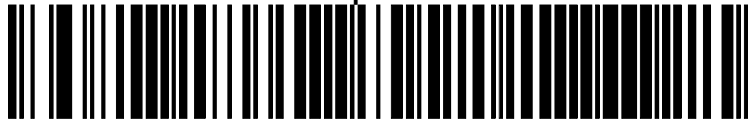

\$P, CBPV002, P

Good Read Beep Volume = **HIGH** (Default)

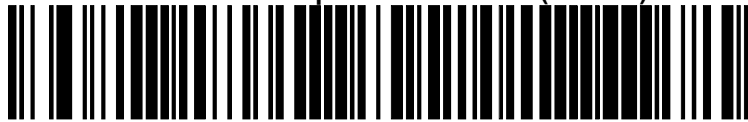

\$P, CBPV003, P

MAGELLAN

2xxx / 8xxx Handheld Port Enable

