


10	NC	21	LVDS Clock-		
11	Data0-	22	Backlight 5V		

8. JRS1, JRS2, JRS3, JRS4, JRS5 (Only COM2 available for RS232,RS422 or RS485 selections)



Default 1-2

Pin	Definition
1	RS232
2	UART RXD
3	RS422
4	UART RXD
5	RS485
6	UART RXD

JRS2, JRS3, JRS4, JRS5



JRS2: Default 2-3 short

Pin	Definition
1	RS485 D-
2	COM2 Pin 1
3	RS232 DCD

JRS3: Default 2-3short

Pin	Definition
1	RS485 D+
2	COM2 Pin 2
3	RS232 RXD


JRS4: Default 2-3

Pin	Definition
1	RS422 D-
2	COM2 Pin 4
3	RS232 DTR

JRS5: Default 2-3

Pin	Definition
1	RS422 D+
2	COM2 Pin 3
3	RS232 TXD

9. JCOM1, JCOM2, JCOM3, JCOM5, JCOM6 (for Pin 9 output 5V,12V or RI)

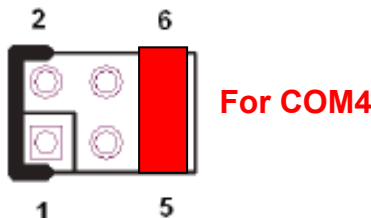

Default 3-4 Short

Pin	Definition
1-2 Short	5V
3-4 Short	RI
5-6 Short	12V

***PS: JCOM4 is always set as 5-6 short for VFD display
JCOM6 is always set as 1-2 short for built-in LCM