


LAN-Configurator

Needed Software


1. Zebra Net Bridge installieren
2. Zebra Setup Utility installieren

1. install Zebra Net Bridge

- Download: http://www.novopos.ch/client/ZEBRA/ZebraNet_Bridge/setup.exe
- install ZebraNet_Bridge (setup.exe)
- run ZebraNet_Bridge

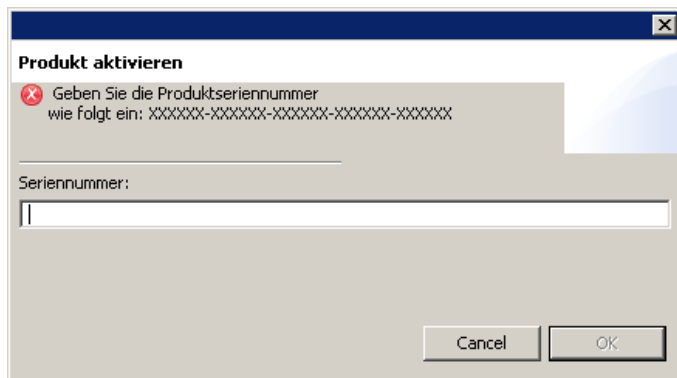

select cancel

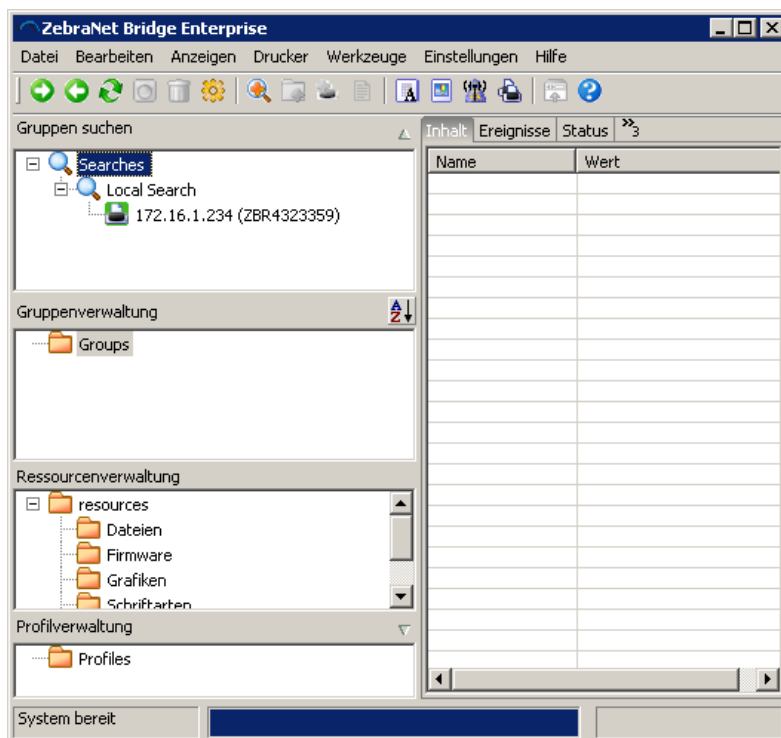

- check "search/local search" and **remember IP-Address**
- close Net Bridge

- run Web Browser and type the **IP Address**
- select "Druckereinstellungen anzeigen und ändern"
- at "PASSWORT-EINGABE" type 1234
- select "Zugriff gewährt. Für diese IP-Adresse besteht nun Admin.- Zugriff auf eingeschränkte Druckerseiten. Hier klicken um fortzufahren"
- select "NETZWERKKONFIGURATION"
- select "TCP/IP-Einstellung"

Einstellung	Intern angeschlossen
IP-ADRESSE	172.016.001.234
IP-Protokoll	Permanent
SUBNET-MASKE	255.255.255.000
STANDARD-GATEWAY	172.016.001.001
WINS SERVER IP	172.026.160.054
TIMEOUT CHECKING	Ja
TIMEOUT VALUE	300
ARP INTERVAL	0
BASE RAW PORT	9100
CLIENT ID AKTIVIERT	AUS
CLIENT ID-ART	MAC-ADRESSE
CLIENT ID-PRÄFIX	
CLIENT ID-SUFFIX	00074d41f81f

Änderungen senden

Änderungen zurücksetzen

- IP-Adresse: Type your individual IP - Adress
- IP-Protokoll: select permanent
- when finish select "Änderungen senden"
- ==> Änderungen wurden erfolgreich gespeichert (**temporär**).
- select "Druckereinstellungen anzeigen und ändern"
- select "**Aktuelle Konfiguration speichern**"

27.7.2012 fe

NOVOPOS AG